
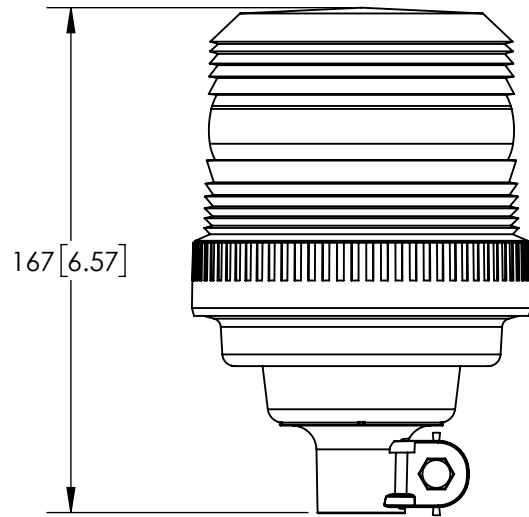


REVISION HISTORY		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE PER LC1492	2018-05-22
B	REVISED PER LC2114	2019-06-19
C	REVISED PER LC2445	2020-03-23

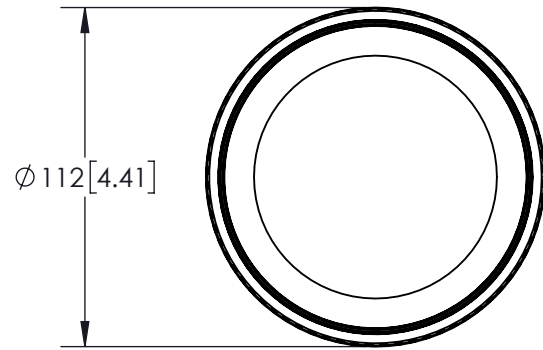

SPECIFICATIONS

1. CERTIFICATIONS: ECE R10

Note: Unique components, accessories and hardware kits are not typically Included in the product certification test protocols. Unless otherwise Specified, the product certification referred to herein are predicated Upon The base product model configuration.



- FLASH MODE: 135 ± 15 FLASHES PER MINUTE (DOUBLE FLASH)
- VOLTAGE (NOMINAL): 12/24 VDC
- VOLTAGE (EXTREME): 10 to 36VDC
- CURRENT (RMS): 1.06A (@ 12 VDC NOMINAL)
- CURRENT (PEAK): 1.85A (@ 12 VDC NOMINAL)
- POWER (RMS MAXIMUM): 23W (@ 24 VDC NOMINAL)
- TEMPERATURE RANGE: -20°C (-4°F) TO 50°C (122°F)
- CONNECTION: DIN POLE
- MOUNTING: POLE MOUNT
- BASE MATERIAL: ABS
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 1.32Lbs. (0.6 kg)

NOTES:

- DIMENSIONS IN MILLIMETRES [INCHES (FOR REFERENCE)]
- USE SUB ASSEMBLY (100-EB5012G) FOR MANUFACTURE

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2019 ELECTRONIC CONTROLS COMPANY

SCALE 1:2.5		APPROVALS	DATE	<div>ECCO[®] www.eccolink.com</div> <div>Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444</div> <div>ECCOLED, BRONZE, FLEXI POLE, GRN, 12/24V</div> <div><div>CUSTOMER PART NO. EB5012G</div><div>PRODUCT SERIES: ECCOLED</div><div><div>SIZE: A4</div><div>DWG. NO. EB5012G</div><div>REV. C</div></div></div>
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: C		DRAWN BY NP	2020-03-05	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED LSH	2020-02-03	
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm		MECH. ENG. FP	2020-03-10	
INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02		ELEC. ENG. MMG	2020-02-03	
ANGLES ± 0.5° FRACTIONS ± 1/64		TEST ENG. JUP	2020-01-09	
<div>THIRD ANGLE PROJECTION</div> 		SALES.		
Electronically Controlled Use Latest Copy		SHEET 1 OF 1		
		Project: LC1492		
		Date Created: 2018-02-05		

