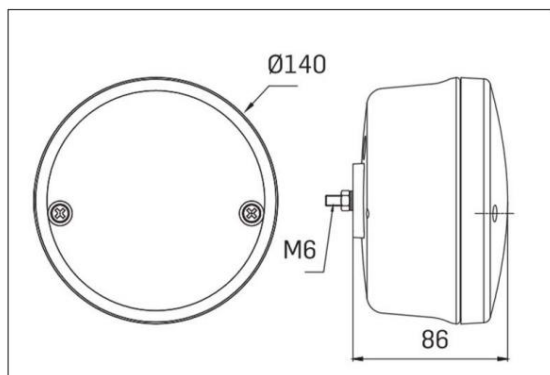











Specifications

Series	VC-5500		
Features	Tail/brake/indicator light (flashing light statically or dynamically adjustable)		
Lenskleur	Red/yellow:	VC-5500 (B5)	
	Darklook:	VC-5500D (B5)	
	Transparent:	VC-5500C (B5)	
Dimensions	ø140 x 86mm		
Heart to heart	45mm		
Voltage range	12-24v		
Power (13.5-28v)	Taillight:	1W /	1W
	Brake light:	4,5W/	4,5W
	Flashing light:	7.5W /	10W
IP value	IP68		
Connection	Without cable / 5-PIN's bayonet		
Resistance	Flashing light with a resistor		
Housing material	Polycarbonate		
Lens material	Polycarbonate		
Certificates	ECE-R10, ECE-R148, D-Homologation, ADR		
Guarantee	2 years		



Adjustable flashing light

	Static flashing light per lamp	
	Dynamic flashing light per lamp	
	Static flashing light over 2 lamps	
	Dynamic flashing light over 2 lamps	
	Dynamic flashing light per lamp	
	Dynamic flashing light over 3 lamps	